

WAKO HEBI CURVE HBO26



FEATURES

- Uniform Light Distribution
- High Color Rendering
- Single Bin
- Curvable Light Formation
- IP65 Protection option

APPLICATIONS

- Architectural Lighting
- Indirect Lighting
- Indoor Lighting
- Semi-Outdoor Lighting



Ra	95
R1	95
R2	97
R3	97
R4	94
R5	95
R6	95
R7	99
R8	97
R9	95
R10	96
R11	91
R12	90
R13	95
R14	97
R15	96

SPECIFICATIONS


DIMENSION

Size	13 mm (W) x 15 mm (H)
Unit length	4000 mm
Cutlength	33.3 mm
Bending radius	85 mm
Storage temperature	-20°C to 70°C
Operating temperature	-10°C to 50°C

OPTICAL

Color temperature	2400K / 2700K / 3000K / 3500K / 4000K / 5000K
CRI	>95
SDCM	<2 / Single Bin
LED per meter	60
Lumen/meter ^{*1}	800 lm
Lifetime LM-80	>60000 hrs

EXTERNAL DIMENSION

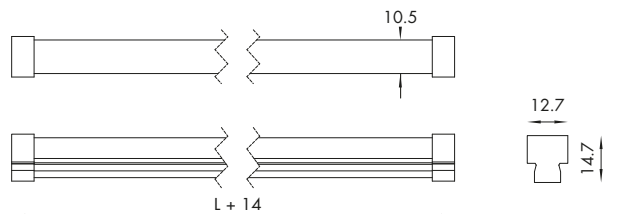


ELECTRICAL

Power input	DC 24V
Power consumption	10 W/m
Maximum length per circuit	7 m
Dimming (by external driver)	0-10V / 1-10V / DALI / DMX

CERTIFICATIONS

IP class	IP65
Safety standard	EN55015 EN61000-3-2 EN61000-3-3 EN61547 EN62031 EN62471 EN62493 EN62778

PHOTOMETRIC



^{*1} Typical value based on 3000K, CRI>95, 10W/m

ACCESSORIES OPTIONS



Mounting Bracket¹
M00000074



¹ To be installed with M3 flat head screws (not included)

ORDER CODE SYSTEM

HBO26-V 027-100-B D 4000

1

2

3

4

5

1 CRI
V >95

2 CCT
024 2400K
027 2700K
030 3000K
035 3500K
040 4000K
050 5000K

3 POWER
100 10 W/m

4 CABLE ENTRY
A Single End
B Double End

5 LENGTH
4000 4000mm

¹ Each product comes in reel of 4m length

² This product requires a constant voltage power supply, please contact WAKO for recommended models

³ All data provided are typical values with manufacturing tolerances up to 10%

⁴ For further requirements, please contact WAKO